




SERIES 151N COMPACT STYLE



Acc. to
NSF 61

Brass ball valve, female/female, full port sizes 1/2" to 2".

- Pressure rating 600 WOG - 150 WSP.
 - Temperature to 366°F.
 - Blow out proof stem, chrome plated brass ball.
 - P.T.F.E. seats and double O-RING stem packing.
- 100% electronically tested in the open and closed position at 80 PSI.

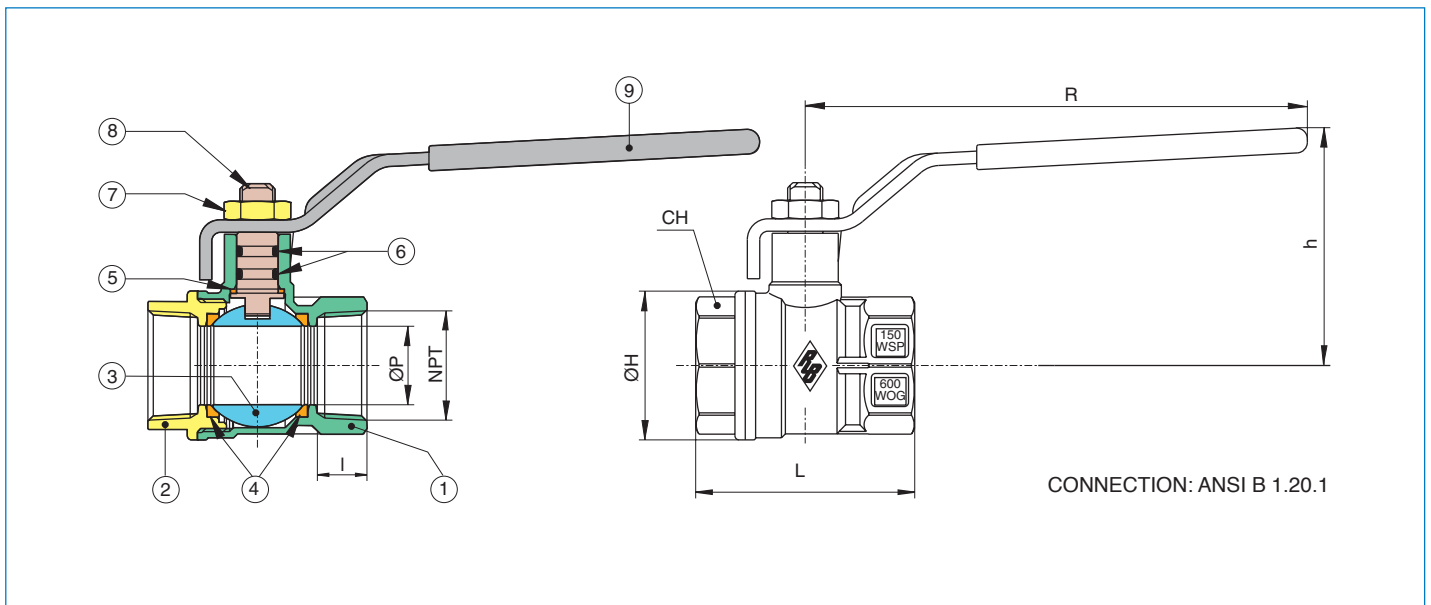

N Pos	PART NAME	MATERIAL	N PCS
1	BODY	BRASS CW 617N UNI EN 12165	1
2	END CONNECTION	BRASS CW 617N UNI EN 12165	1
3	BALL	BRASS CW 617N UNI EN 12165	1
4	BALL SEAT	P.T.F.E	2
5	THRUST WASHER	P.T.F.E	2
6	O-RING	NBR VITON®	1 1
7	NUT	Steel 6S	2
8	STEM	BRASS CW 614N UNI EN 12164	1
9	HANDLE	Fe DD11 UNI EN 10111	1

SIZE	ØP	I	L	ØH	CH	R	h	CV	PSI	Lbs
1/2"	0.55	0.47	1.87	1.18	0.98	3.86	1.77	19.00	600	0.35
3/4"	0.75	0.47	2.08	1.41	1.22	4.80	2.22	34.50	600	0.62
1"	0.94	0.57	2.58	1.71	1.49	4.80	2.32	50.18	600	0.91
1 1/4"	1.18	0.63	3.01	2.08	1.88	6.02	2.87	103.70	600	1.53
1 1/2"	1.50	0.70	3.50	2.56	2.12	6.02	3.09	268.40	600	2.17
2"	1.85	0.75	4.05	3.15	2.63	6.38	3.66	309.20	600	3.55


SERIES 1515 COMPACT STYLE



Acc. to
NSF 61

Brass ball valve with solder ends, full port sizes 1/2" to 2".

- Pressure rating 600 WOG - 150 WSP.
 - Temperature to 366°F.
 - Blow out proof stem, chrome plated brass ball.
 - P.T.F.E. seats and double O-RING stem packing.
- 100% electronically tested in the open and closed position at 80 PSI.

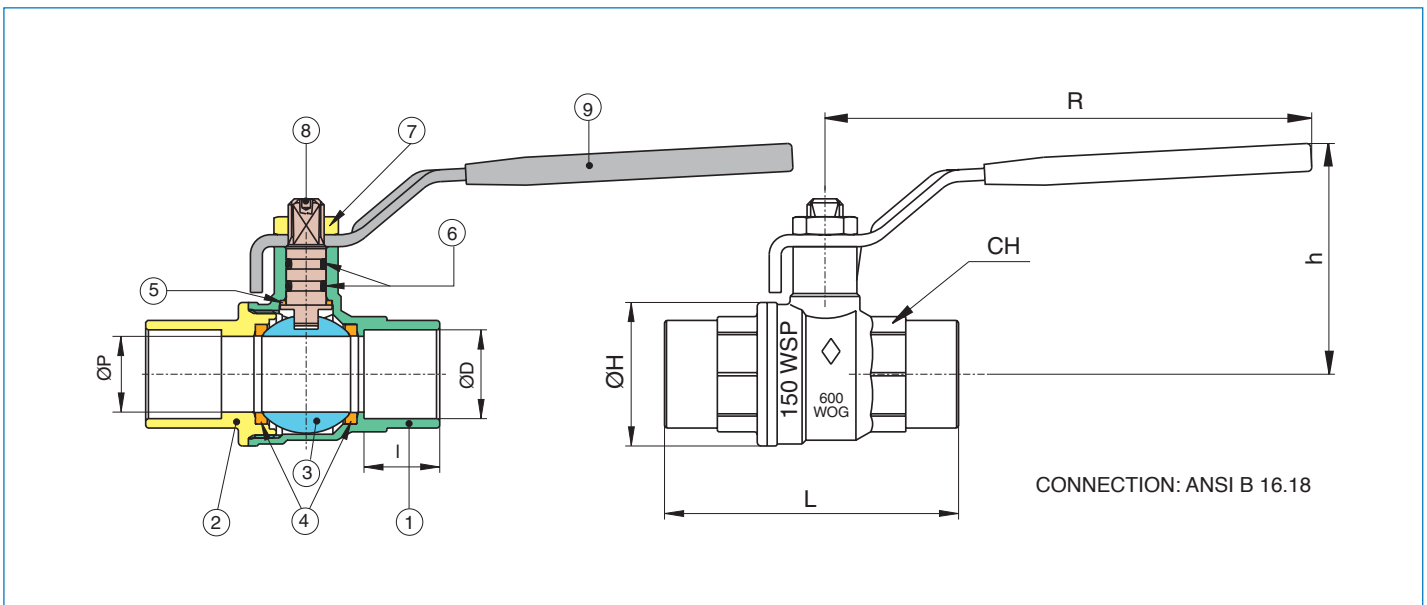

N Pos	PART NAME	MATERIAL	N PCS
1	BODY	BRASS CW 617N UNI EN 12165	1
2	END CONNECTION	BRASS CW 617N UNI EN 12165	1
3	BALL	BRASS CW 617N UNI EN 12165	1
4	BALL SEAT	P.T.F.E	2
5	THRUST WASHER	P.T.F.E	1
6	O-RING	NBR VITON®	1 1
7	NUT	Steel 6S	1
8	STEM	BRASS CW 614N UNI EN 12164	1
9	HANDLE	Fe DD11 UNI EN 10111	1

SIZE	ØP	ØD	I	L	ØH	CH	R	h	CV	PSI	Lbs
1/2"	0.55	0.62	0.50	2.19	1.18	0.98	3.86	1.77	19.00	600	0.40
3/4"	0.75	0.87	0.75	2.77	1.41	1.22	4.80	2.22	34.50	600	0.62
1"	0.94	1.13	0.91	3.36	1.71	1.49	4.80	2.32	50.18	600	0.95
1 1/4"	1.18	1.38	0.97	3.86	2.08	1.88	6.02	2.87	103.70	600	1.64
1 1/2"	1.50	1.63	1.10	4.45	2.56	2.12	6.02	3.09	268.40	600	2.33
2"	1.85	2.13	1.34	5.31	3.15	2.63	6.38	3.66	309.20	600	3.77